




Apex TM772 Rear Camera Replacement

Instructions on how to replace the camera on the Apex TM772.

Written By: Doran Van Bommel

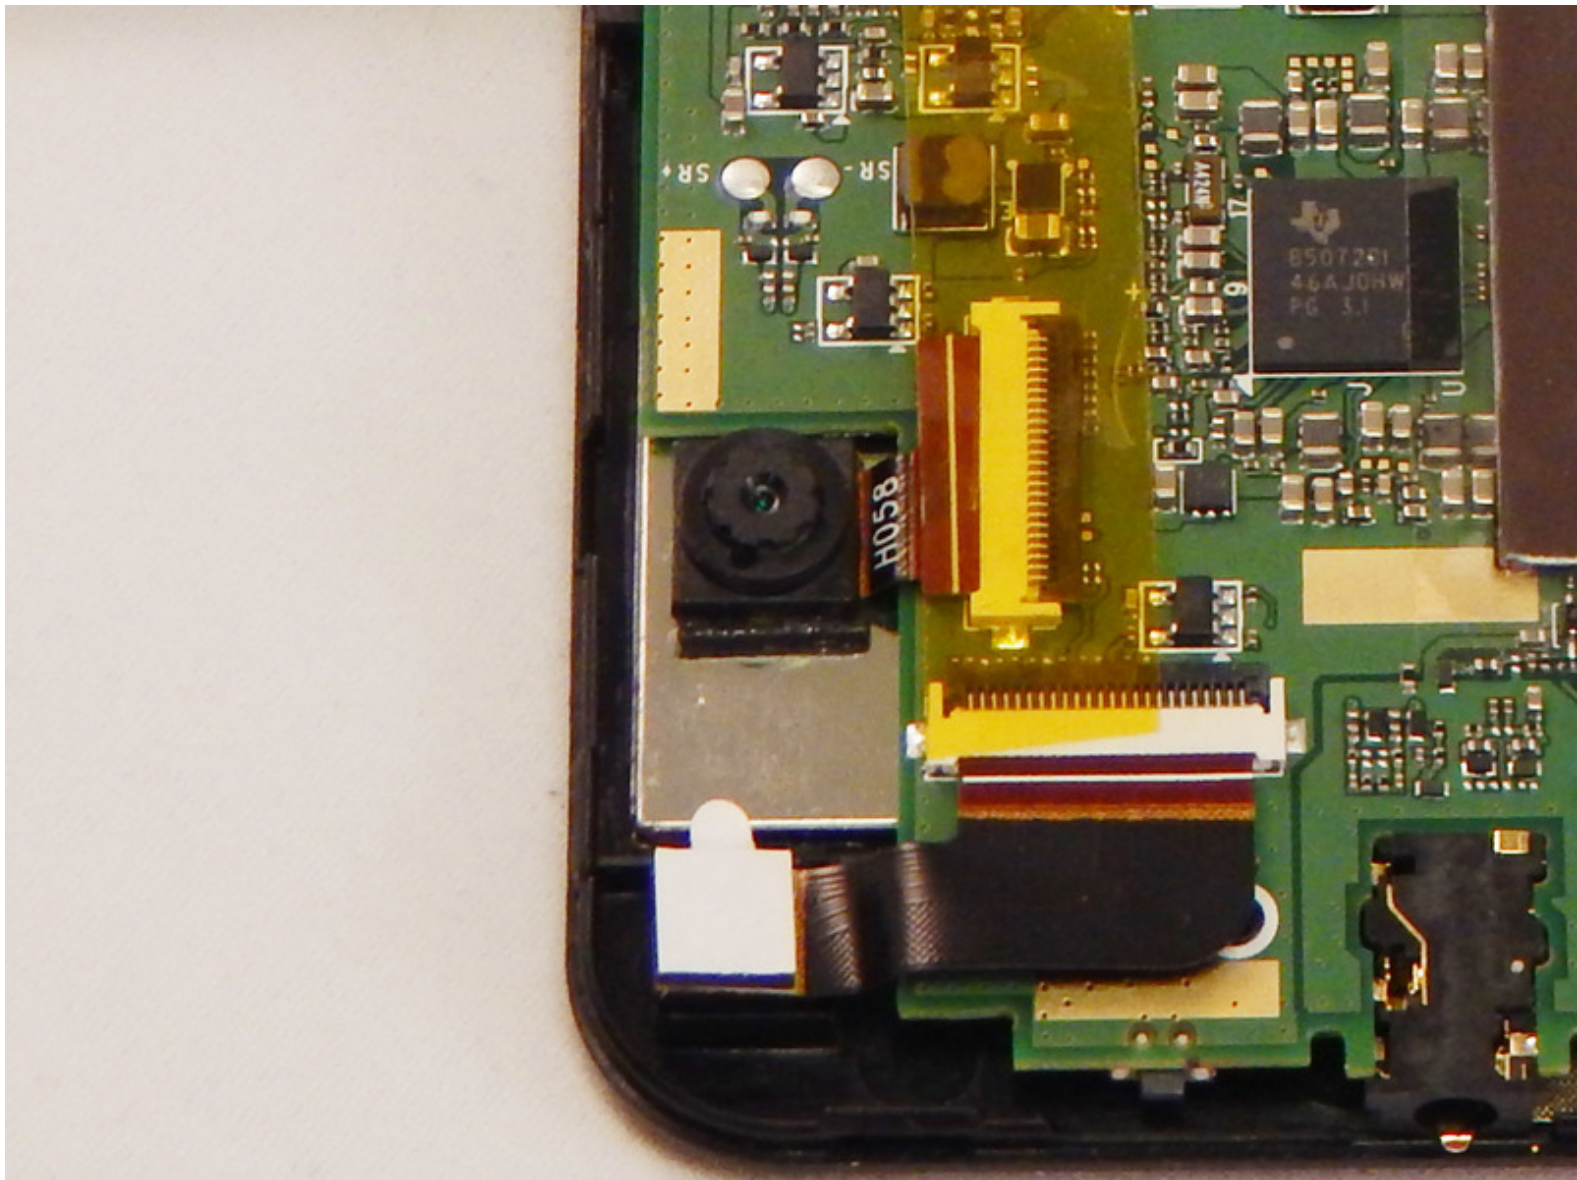

INTRODUCTION


Instructions on how to replace the camera on the Apex TM772.



TOOLS:


- [Tweezers](#) (1)
-

Step 1 — Rear Camera

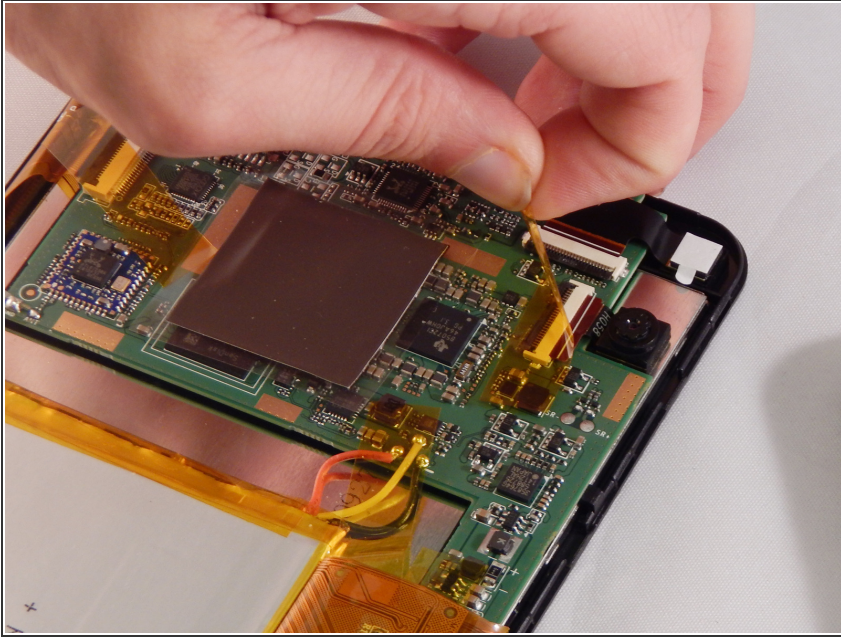

- i** The rear facing camera is located at the top right just below the front facing camera as looking inside the device.
- With tweezers or your fingers remove the tape covering the camera's pin connector.

Step 2

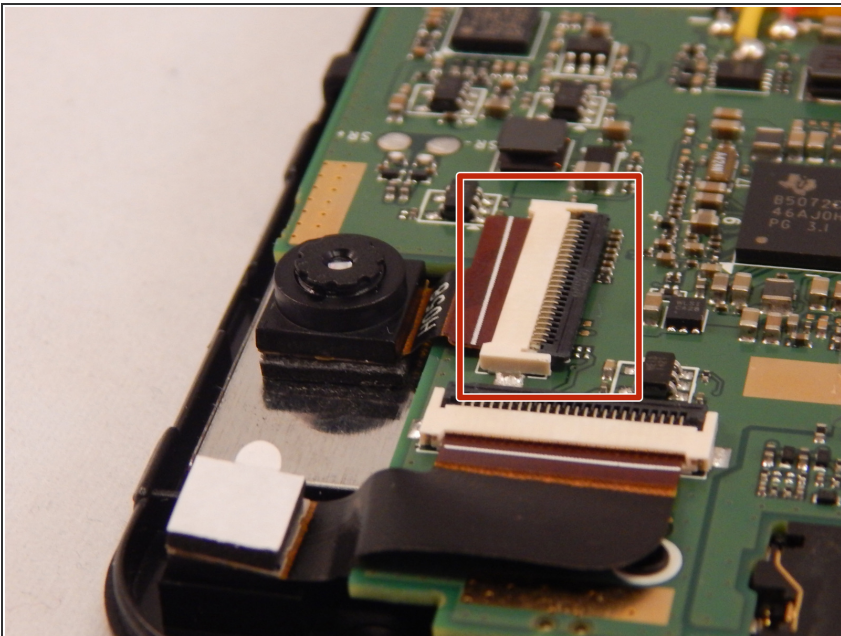

- With tweezers, flip the black latch to open the pin connector and remove the cable.

Step 3



- The camera is adhered to the device with double sided foam tape. Carefully remove the camera from the tape with a metal spudger. If the tape is damaged, you'll need to replace it.
- Replace the camera with the new one and assemble the device in reverse of these instructions.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-27 04:15:41 PM.